



382A012-046

Y transition heat-shrinkable shapes

A) As supplied

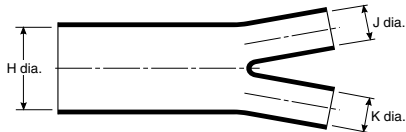

B) After recovery

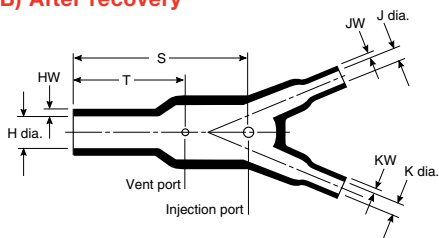

Applications

Used for mechanical protection and cable strain relief. Ideal for cable harness applications where balanced cable branches are required.

Materials available

- 3 Semi-rigid modified Polyolefin.
- 4 Flexible modified Polyolefin.
- 12 Modified Fluoro-elastomer.
- 25 Fluid resistant modified Elastomer.
- 100 Low fire hazard material.

Coatings available

- 3 & -4 /42 General purpose hot melt adhesive.
- /86 High performance hot melt adhesive.
- 25 /42 General purpose hot melt adhesive.
- /86 High performance hot melt adhesive.
- /225 Pre-coated high temperature curing adhesive.
- 100 /86 High performance hot melt adhesive.
- /180 low fire hazard hot melt adhesive.
- CS1972 Adhesive tape

Dimensions (all dimensions are in mm)

Part Number	A) Dimensions as supplied (min)			B) Dimensions after heating recovery (max)							Weight
	H	J	K	H	J	K	S ±10%	T ±10%	HW ±10%	JW/KW ±10%	
382A012	13.2	6.6	6.6	6.1	3.3	3.3	23.9	15.5	1.52	1.02	1.7g
382A023	26.9	13.2	13.2	12.4	6.1	6.1	53.3	33.0	2.54	1.52	13.6g
382A034	38.6	26.9	26.9	18.0	12.4	12.4	78.7	55.9	3.05	2.54	55.5g
382A046	55.6	26.9	26.9	25.9	12.7	12.7	111.8	71.1	4.57	2.54	93.4g

Ordering Information

- Standard colour: 0 = Black.
- Size selection: To determine the size of the required moulded part, please refer to table.
- Standard packaging: Moulded parts are individually packaged.
- Ordering description: Specify the product name, size, material and coating required.
- Ordering Example: To fit a 8mm cable O/D and two 4mm O/D breakouts, using -25 material in black = **382A012-25-0**.

Note: For a detailed description on how to construct your moulded part, please refer to the Moulded Parts Numbering Guide. A range of slimline Y transitions are also available e.g. 381A30X. For more information please contact us.