

# Moulded Parts and Shapes

## 362A014 to 114

### Transitions

#### 30° Transition, heat shrink boots

Used for mechanical protection and cable strain relief. Ideal for cable harness applications where cable branches and breakouts are required.

#### Ordering Information

- Standard colour Black.
- Size selection please refer to table below.
- Packaged individually
- Please specify the product name, size, material, coating and any modifications required, as per Part Number System earlier in this section.
- Adhesive coating is optional. If added the entry dimensions will be reduced by 1.5mm.

#### Part Number Example:


**362A024-3/42-0**

Moulded part in semi rigid polyolefin, with adhesive coating, colour black.

#### As supplied



#### After Recovery

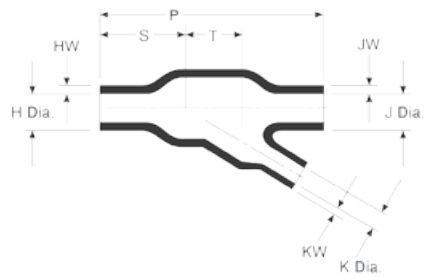

### Product Dimensions Selection Table

Dimensions as Supplied	Dimensions After Recovery										
	H, J	K	H, J	K	P ±10%	S ±10%	T ±10%	HW & JW ±20%	KW ±20%	Weight	
<b>Part Number</b>											
362A014	30.5	20.3	15.7	10.7	82.6	31.8	21.1	2.54	1.78	20.4g	
362A024	35.6	15.2	18.3	8.6	63.5	19.1	22.4	2.54	1.52	13.3g	
362A114	35.6	10.2	18.8	5.3	61.0	19.1	21.3	2.79	1.52	13.2g	

All dimensions in mm unless otherwise stated. Weight is based on polyolefin part

Optional 'Injection' (S) and 'Vent' (T) ports indicated above, see part number system earlier in this section.

### Materials Available

Material	Material Description
-3	Semi-rigid polyolefin
-4	Flexible polyolefin
-12	Fluoro-elastomer
-25	Fluid resistant elastomer
-100	Polyolefin, Zerohal

### Environmental Adhesives Available

Optional Pre-coat	Optional User Applied
/42 or /86	S-1017 or S-1048
/42 or /86	S-1017 or S-1048
N/A	S-1255-04
/42 or /86 or /225	S-1017 or S-1048 or S-1125
/86 or /180	S-1048 or S-1030

For more information on materials and adhesives, please refer to relevant sections of this catalogue.