


562A011 to 067


Transitions

1 to 4 Transition, heat shrink boots

As supplied

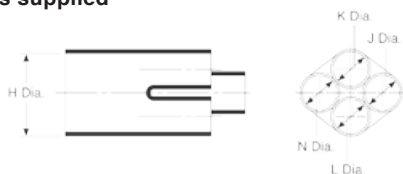

After Recovery

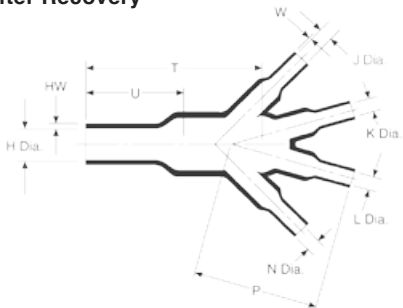

Used for mechanical protection and cable strain relief. Ideal for cable harness applications where multiple cable branches are required.

Ordering Information

- Standard colour Black.
- Size selection please refer to table below.
- Packaged individually
- Please specify the product name, size, material, coating and any modifications required, as per Part Number System earlier in this section.
- Adhesive coating is optional. If added the entry dimensions will be reduced by 1.5mm.

Part Number Example:

562A011-4-0

Moulded part in flexible polyolefin, colour black.

Product Dimensions Selection Table

Dimensions as Supplied				Dimensions After Recovery						
Dimension	H	J, K, L, N	H	J, K, L, N	P ±10%	T ±10%	U ±10%	HW ±20%	W ±20%	Weight
Part Number										
562A011	13.2	6.6	6.9	3.4	24.1	43.9	18.0	1.52	1.02	3.6g
562A022	19.3	9.4	9.7	5.3	35.6	43.2	23.1	1.78	1.02	6.2g
562A032	19.3	13.2	9.7	6.9	49.3	50.5	25.4	1.78	1.52	13.6g
562A043	26.9	13.2	13.0	6.9	49.3	65.8	33.5	2.54	1.52	18.6g
562A054	38.6	19.3	18.5	9.7	71.9	95.3	46.5	3.05	1.78	54.4g
562A067	55.6	26.9	26.7	13.0	101.6	135.1	65.5	4.57	2.54	150g

All dimensions in mm unless otherwise stated. Weight is based on polyolefin part
Optional 'Injection' (S) and 'Vent' (T) ports indicated above, see part number system earlier in this section.

Materials Available

Material	Material Description
-3	Semi-rigid polyolefin
-4	Flexible polyolefin
-12	Fluoro-elastomer
-25	Fluid resistant elastomer
-100	Polyolefin, Zerohal

Environmental Adhesives Available

Optional Pre-coat	Optional User Applied
/42 or /86	S-1017 or S-1048
/42 or /86	S-1017 or S-1048
N/A	S-1255-04
/42 or /86 or /225	S-1017 or S-1048 or S-1125
/86 or /180	S-1048 or S-1030

For more information on materials and adhesives, please refer to relevant sections of this catalogue.