




### S1017

#### Hot-Melt Thermoplastic Adhesive Tape

S1017 is a general purpose, hot-melt thermoplastic adhesive supplied in tape form for easy application to cable substrates. A tough yet flexible adhesive, it is suitable for bonding polyolefins, vinyls, neoprene and metals such as steel and aluminium.

Temperature Range:  
-20°C to +60°C

Packaging:  
S1264: 25mm x 0.3mm x 15m roll

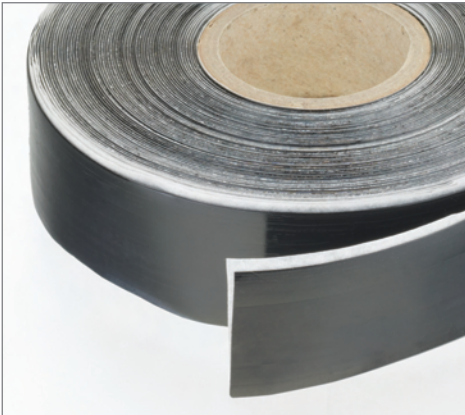

### S1030

#### Hot-Melt Adhesive Tape

S1030 tape is a non-flame retarded polyolefin based hot-melt adhesive tape. The product is recommended for high flexibility at temperatures as low as -80°C. The tape is often pre-applied to low fire hazard moulded parts; its pre-coat designation is /180.

Temperature Range:  
-80°C to +80°C

Packaging:  
S1030: 20mm x 0.3mm x 10m roll



### S1048

#### Hot-Melt Adhesive Tape

S1048 is a hot-melt adhesive that can be supplied coated onto moulded parts as designation /86. It is generally used as a high-strength hot melt adhesive.

Temperature Range:  
-55°C to +120°C

Packaging:  
S1048: 25mm x 0.66mm x 30m roll

# Adhesives and Tapes

## S1297, S1255 & S1305

### Tape Sealants

#### Overview



#### S1297

##### Holt-Melt Thermoplastic Adhesive Tape

S1297 is a hot-melt thermoplastic pre-coat adhesive designed for use with IS-Rayfast heavy duty boots and cable entry seals. It is suitable for bonding to various cable jacket substrates including Polyethylene, PVC, Polychloroprene and metals such as Steel and Aluminium

Temperature Range:

-20°C to +90°C

Packaging:

S1297: 25mm x 0,3mm x 3m roll



#### S1255-04

##### High Temperature Adhesive Tape

S1255-04 one part epoxy tape has been developed to match the superior chemical and heat resistance properties of IS-Rayfast's fluoroelastomeric high performance materials.

Temperature Range:

-55°C to +200°C

Packaging:

S1255-04: 20mm x 0.5mm x 30m



#### S1305

##### Halogen Free Hot-Melt Sealant Tape


S1305 is a flame retardant halogen free hot-melt thermoplastic grey butyl sealant designed for use with IS-Rayfast's heavy duty breakout moulded parts, to offer excellent water sealing and weatherproofing.

Temperature Range:

-40°C to +90°C

Packaging:

S1305: 25mm x 1.6mm x 7.6m

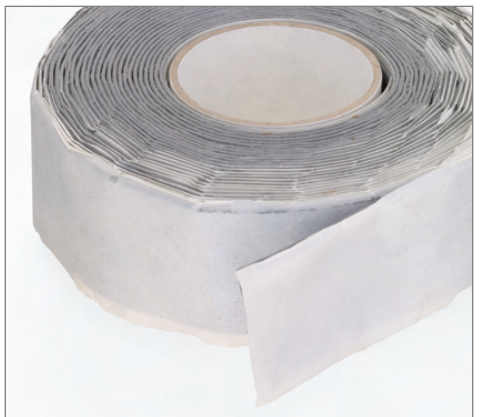

For more detailed information please contact us.

© 2015 IS-Group all rights reserved no unauthorised reproduction

[www.isgroup-international.com](http://www.isgroup-international.com)