

## SR

### Silicone Rubber

#### High elasticity & temperature withstand

Silicone rubber has a good resistance to low and high temperatures and has good compatibility with numerous chemicals and excellent ageing characteristics. Extremely useful for cable harnessing because of its high elasticity and flexibility.

#### Features & Benefits


- Excellent fluid and temperature resistance
- Flexibility at low temperatures
- Wide range of sizes available

#### Operating Temperature

- From -60°C to +180°C
- Intermittent temperature 250°C

#### Installation

- Push on application, no heat required

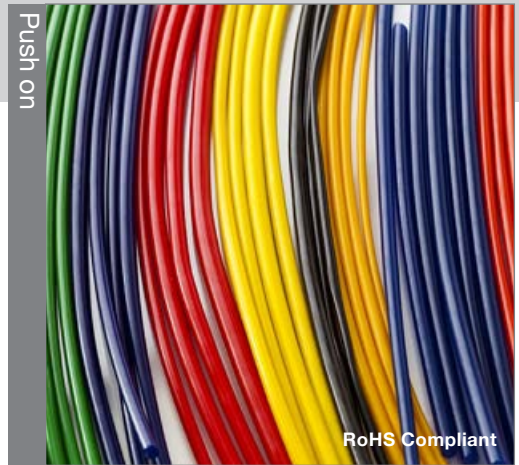

#### Specifications & Approvals

- BS2848 Type 5 Class 180TB

Inside Diameter	Wall Thickness	Pack Size	Part Number
Nominal as Supplied (mm)	Nominal Standard (mm)	Spools (SP)	
0.50	0.5	50m	SR-0.5/0.5-Colour
0.75	0.5	50m	SR-0.75/0.5-Colour
1.00	0.5	50m	SR-1.0/0.5-Colour
1.50	0.5	50m	SR-1.5/0.5-Colour
2.00	0.5	50m	SR-2.0/0.5-Colour
2.50	0.5	50m	SR-2.5/0.5-Colour
3.00	0.5	50m	SR-3.0/0.5-Colour
4.00	0.5	25m	SR-4.0/0.5-Colour
5.00	0.5	25m	SR-5.0/0.5-Colour
6.00	0.5	25m	SR-6.0/0.5-Colour
8.00	0.5	25m	SR-7.0/0.5-Colour
10.00	0.5	25m	SR-10.0/0.5-Colour

#### Note:

- Other colours and wall thicknesses are available, subject to minimum order quantities.

**Part Number Example; SR-3.0/0.5-RED** 3.0mm inside diameter, red tubing, supplied on spools.

#### Ordering Information

Standard colours: Black, Red, Yellow, Green, Blue, White  
 Size selection: The smallest size that provides the best fit.  
 Standard packaging: Spools only