

# Moulded Parts and Shapes

## 202K111 to 185

Lipped

Straight, boot

Mechanical protection & cable connector strain relief.  
Part includes a lip or lips as required, can be installed onto circular adaptors of the appropriate shell size.

### Ordering Information

- Please specify the product name, size, material, coating and any modifications required, as per Part Number System earlier in this section.
- Adhesive coating is optional. If added the entry dimensions will be reduced by 1.5mm.
- Dimensions apply to all available materials unless otherwise stated.
- If eyelet clip (000W212) is required with potting ports then add CS-1858 to part number


### Part Number Example: 202K163-3/42-0

Moulded part in semi-rigid polyolefin, with optional general purpose adhesive coating, colour black.

### As supplied



### After Recovery

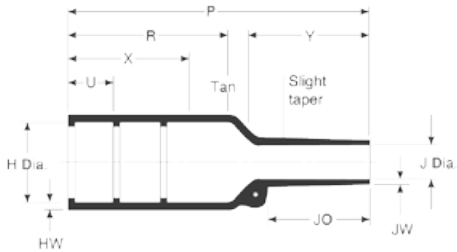

### Product Dimensions Selection Table

Dimension	Dimensions as Supplied			Dimensions After Recovery									
	H	J		H	J	P ±10%	R ±10%	U ±10%	JO ±10%	HW ±10%	JW min	Weight	
Material		3, 4, 25	12	100									
Part Number													
202K111	17.0	17.0	13.0	14.0	6.9	3.0	39.0	24.0	12.0	10.8	1.3	0.7	1.3g
202K121	24.0	24.0	13.0	14.0	10.4	5.6	38.0	21.0	12.0	8.5	1.9	0.41	2.4g
202K132	30.0	30.0	14.0	15.0	14.2	5.9	55.0	32.0	12.0	11.5	1.8	0.81	4.8g
202K142	31.0	31.0	16.0	18.0	18.0	7.1	67.0	35.0	20.0	17.0	1.8	0.81	9.9g
202K153	36.0	36.0	19.0	21.0	22.4	8.4	80.0	42.0	20.0	19.5	2.0	0.81	12.0g
202K163	43.0	43.0	22.0	25.0	28.2	9.9	99.0	61.0	20.0	21.0	2.2	0.81	20.0g
202K174	60.0	60.0	35.0	39.0	35.1	15.7	130.0	72.0	20.0	39.0	3.3	1.02	44.5g
202K185	66.0	66.0	38.0	42.0	44.5	16.8	170.0	90.0	20.0	51.5	3.8	1.63	-

All dimensions in mm unless otherwise stated. Weight is based on polyolefin part  
Injection and potting ports also available see part number system earlier in this section

### Materials Available

Material	Material Description
-3	Semi-rigid polyolefin
-4	Flexible polyolefin
-12	Fluoro-elastomer
-25	Fluid resistant elastomer
-100	Polyolefin, Zerohal

### Environmental Adhesives Available

Optional Pre-coat	Optional User Applied
/42 or /86	S-1017 or S-1048
/42 or /86	S-1017 or S-1048
N/A	S-1255-04
/42 or /86 or /225	S-1017 or S-1048 or S-1125
/86 or /180	S-1048 or S-1030

For more information on materials and adhesives, please refer to relevant sections of this catalogue.