

# Moulded Parts and Shapes

## 207W213 to 256

### Feedthroughs

#### 2 Part bulkhead feedthrough

Feedthroughs provide an effective pressure seal when used with cables passing from pressurised to non-pressurised areas. Also provide excellent strain relief and bulkhead abrasion protection.

#### Ordering Information


- Standard colour Black.
- Packaged individually
- When ordering specify the product name, size, material, coating and modifications required, as per Part Number System.
- Adhesive coating is optional. If added the entry dimensions will be reduced by 1.5mm.

#### Part Number Example:


**207W234-25/86-0**

Moulded part in fluid resistant polyolefin, with adhesive coating, colour black.

#### As supplied

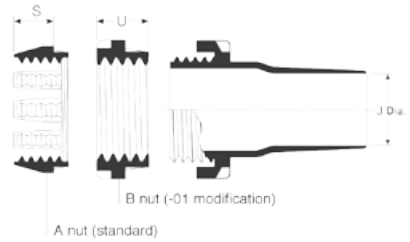

#### After Recovery

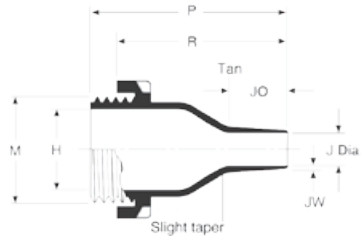

### Product Dimensions Selection Table

Dimension	Dimensions as Supplied		Dimensions After Recovery								Weight	
	H	J	H	J	M Thread	P ±10%	R ±10%	S ±20%	U ±10%	JO ±10%		
<b>Part Number</b>												
207W213	13.2	6.6	6.6	3.6	46.2	30.5	15.7	1.52	1.02	1.02	2.3g	
207W223	26.9	13.2	13.2	6.9	93.2	57.2	33.0	2.54	1.52	1.52	16.2g	
207W234	38.6	19.3	18.8	9.7	135.1	88.9	45.7	3.05	1.78	1.78	38.3g	
207W245	55.6	26.9	25.4	12.4	192.0	121.9	71.1	4.57	3.05	3.05	143g	
207W256	91.4	45.7	54.6	27.4	390.4	254.0	127.0	7.11	4.57	4.57	862g	

All dimensions in mm unless otherwise stated. Weight is based on polyolefin part

#### Materials Available

Material	Material Description
-3	Semi-rigid polyolefin
-4	Flexible polyolefin
-12	Fluoro-elastomer
-25	Fluid resistant elastomer
-100	Polyolefin, Zerohal

#### Environmental Adhesives Available

Optional Pre-coat	Optional User Applied
/42 or /86	S-1017 or S-1048
/42 or /86	S-1017 or S-1048
N/A	S-1255-04
/42 or /86 or /225	S-1017 or S-1048 or S-1125
/86 or /180	S-1048 or S-1030

For more information on materials and adhesives, please refer to relevant sections of this catalogue.