

222A111 to 196


Non-Lipped

Right angle 90°, boot

As supplied



After Recovery

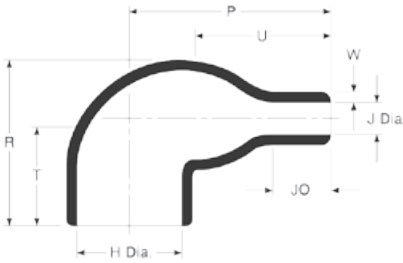

Mechanical protection & cable connector strain relief.
As the part does not have a lip it can be installed directly onto the connector accessory thread.

Ordering Information

- Standard colour Black.
- Please specify the product name, size, material, coating and any modifications required, as per Part Number System earlier in this section.
- Adhesive coating is optional. If added the entry dimensions will be reduced by 1.5mm.
- Moulded parts are individually packaged.
- Dimensions apply to all available materials unless otherwise stated.

Part Number Example: 222A132-25/225-0

Moulded part in fluid resistant elastomer colour black, with high temperature adhesive coating.

Product Dimensions Selection Table

Dimension	Dimensions as Supplied				Dimensions After Recovery								Weight
	H	J			H	J	P ±10%	R ±10%	T ±10%	U ±10%	JO ±10%	W ±10%	
Material		3, 4, 25	100	12									
Part Number													
222A111	17.8	17.8	10.9	9.9	7.9	3.8	17.3	20.1	-	11.4	4.3	1.02	0.9g
222A121	24.9	24.9	16.0	18.0	10.2	5.3	21.3	22.6	-	14.7	5.8	1.27	1.4g
222A132	30.0	30.0	21.1	20.6	14.2	6.4	26.9	26.7	19.1	17.8	7.1	1.52	2.9g
222A142	32.5	32.5	22.9	22.9	17.3	6.9	36.6	30.5	19.1	24.9	10.2	1.78	5.4g
222A152	36.1	36.1	27.4	26.4	21.8	8.4	43.7	35.1	19.1	30.0	12.7	1.78	7.7g
222A163	43.9	43.9	28.4	27.4	27.4	9.4	53.6	43.9	19.1	34.0	17.3	2.03	13.0g
222A174	53.1	53.1	48.3	46.7	33.8	15.0	75.7	52.8	25.4	53.2	32.0	3.30	31.0g
222A185	67.6	67.6	58.4	54.4	44.2	20.3	97.5	66.0	25.4	71.1	40.6	3.81	-
222A196	87.6	87.6	68.8	63.0	55.4	23.4	128.0	79.2	25.4	87.6	56.4	4.57	-

All dimensions in mm unless otherwise stated. Weight is based on polyolefin part
Injection and potting ports also available see part number system earlier in this section

Materials Available

Material	Material Description
-3	Semi-rigid polyolefin
-4	Flexible polyolefin
-12	Fluoro-elastomer
-25	Fluid resistant elastomer
-100	Polyolefin, Zerohal

Environmental Adhesives Available

Optional Pre-coat	Optional User Applied
/42 or /86	S-1017 or S-1048
/42 or /86	S-1017 or S-1048
N/A	S-1255-04
/42 or /86 or /225	S-1017 or S-1048 or S-1125
/86 or /180	S-1048 or S-1030

For more information on materials and adhesives, please refer to relevant sections of this catalogue.

© 2015 IS-Group all rights reserved no unauthorised reproduction